Sframe[™]

Rack Systems

rack heigh **38U, 45U** MAX DEPTH 750mm(29.53 ") MAX WIDTH 600mm(23.62 ") HOLE TYPE
Square, Tapped

Rack Systems

DESCRIPTION

This **SFRAME[™] open rack** can meet your requirements for devices placement and cable management at a very reasonable price. Moreover, it is designed with features of professional high-strength steel or aluminum construction, quick and convenient assembly, easy device installation, and black electrostatic surface treatment for long lasting visual appeal. This **open frame rack** is the ideal option for patch panel, network devices and quick server deployment.

FEATURES



Rugged construction

The numbered marks make the installation process become easier and faster no matter where you start.




SPECIFICATIONS


- 19-inch mounting width suitable for most networking equipment
- Conforms to industry standard ANSI/EIA-310-D mounting configuration
- 360kg (800lbs) static load capacity
- Body and frame fabricated from cold rolled steel or aluminum alloy
- Matte black powder-coated finish

OPTIONS

Sframe™ open rack are offered with an option of two types of material structure:



Steel



Aluminum alloy





Steel, 2-post, square hole

Sframe™ images, data, and content © 2015, 2016 Davis Legend. All rights reserved.



630-286-9878 sales@davislegend.com http://www.davislegend.com



Sfram 8	F	CATEGORY Rack Systems	rack height 38U, 45U	max depth 750mm(29.53 ")	MAX WIDTH 600mm(23.62 ")	HOLE TYPE Square, Tapped
ORDER INFORMATION						
RACK UNITS	MATERIAL	HEIGHT	WIDTH	DEPTH	PART NUMBER	OPTIONS
38U (2-post, tapped hole)	Aluminum	1815mm (71.46inches)	514mm	_	SRK-PKAL-0502-38U514-CH	
45U (2-post, tapped hole)	alloy	2126mm (83.71inches)	(20.23 inches)		SRK-PKAL-0502-45U514-CH	
38U (4-post, tapped hole)		1815mm (71.46inches)			SRK-PKAL-0504-38U51475-CH	SH (Square) CH (Tap)
45U (4-post, tapped hole)		2126mm (83.71inches)			SRK-PKAL-0504-45U51475-CH	BK (Black)
38U (4-post, tapped hole)	Steel	1815mm (71.46inches)	600mm	750mm	SRK-PKST-0604-38U675-CH	WH (White)
38U (4-post, square hole)			(23.62 inches)	(29.53 inches)	SRK-PKST-0604-38U675-SH	
45U (4-post, tapped hole)		2126mm (83.71inches)			SRK-PKST-0604-45U675-CH	
45U (4-post, square hole)					SRK-PKST-0604-45U675-SH	
38U (2-post, tapped hole)	1	1815mm (71.46inches)	514mm	_	SRK-PKST-0602-38U514-CH	
45U (2-post, tapped hole	1	2126mm (83.71inches)	(20.23 inches)	_	SRK-PKST-0602-45U514-CH	


• Standard configurations can be ordered as <PART NUMBER>-<Mounting hole>-C<Color> (eg. SRK-PKST-0602-38U514-CH-CBK).

• Custom configurations also available upon request, please contact our Sales team for more information.

Vertical Cable Management





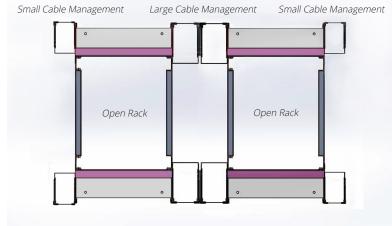

Examples of combined effects

DESCRIPTION

This product is applicable for open rack cable management.

ORDER INFORMATION

PART NAME	PART NUMBER	WIDTH	HEIGHT
36U Vertical Cable Management	SRA-VCST-01-36U-CBK	81mm	1600mm
44U Vertical Cable Management	SRA-VCST-01-44U-CBK	81mm	1956mm
36U Vertical Cable Management	SRA-VCST-02-36U-CBK	141mm	1600mm
44U Vertical Cable Management	SRA-VCST-02-44U-CBK	141mm	1956mm

Sframe[™] images, data, and content © 2015, 2016 Davis Legend. All rights reserved.



630-286-9878 sales@davislegend.com http://www.davislegend.com

